

Art.503105

Electronic basin mixer

Characteristic:

Standard flow at 3 bar: 40 L/min.
Flow rate with adjuster: 6 L/min, 5 L/min, 8 L/min
Pressure: (0.5– 6) bar
Temperature: Max 80°
Standard closing time: 6"

Material:

- * Body in chromed brass plated brass conform to EN 1982, EN 12164, EN 12165 standards
- * Cover in chromed brass conform to EN 1982, EN 12164, EN 12165 standards
- * Base in chromed brass conform to EN 1982, EN 12164, EN 12165 standards

Reference standard:

EN 816:2017

Features:

- * Timing in conformity with EN 816
- * Treatment of the nickel-chrome surface conformity with EN 248 standard
- * Resistance to saline aggression 200h conformity to EN ISO 9227 standard

Accessories/ components supplied:


Fixing kit
Sensor assembly with new cables
Flexible INOX
Valve MICRO
Battery kit
Kit 2 self-tapping screws
Aerator 24x1

Options:

Anti-vandal
Nichel FREE

Notes:

- * Use a filter upstream of the system
- * Cleaning only with water and soft cloth avoiding acids and abrasives
- * You can buy alkaline or lithium batteries

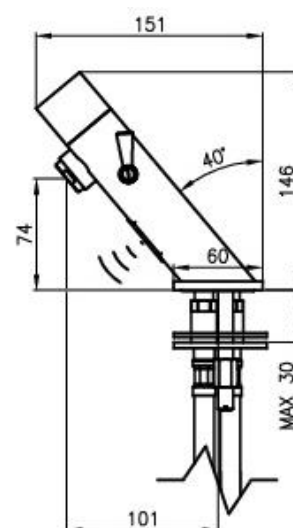

Hamburg - Germany