




Hamburg - Germany

Temporized Urinal Flush valve Art. Nr. 50043

Self closing Urinal-Flush valve, temporized, manufactured according to DIN 3265 (Hydraulic Norm) and DIN 4109 (Noise Level Norm), front push button operated, mechanically released, without water hammer, with a strong flow at low pressure, easy to press even at high pressure. Easy to install and specially designed to allow simple maintenance. Standard cartridge with **vandal proof** prefixed time of 10 seconds ($\pm 20\%$).

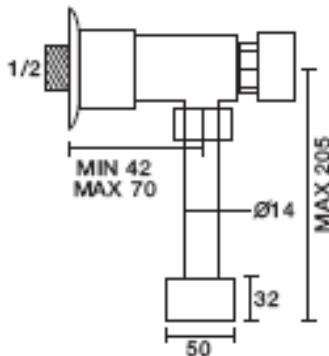

Minimum Working Pressure: 0.5 BAR
Maximum Working Pressure: 5 BAR.
Outlet Adjustable: min. 4 l/min. to 13 l/min.

ATTENTION:

- + If the water pressure is above 4 bar, a pressure reducer is always recommended.
- + the good working of the tap is guaranteed when the water is without impurity. It is important to clean the supply pipes and to install a filter.
- + For changing the water flow, take off the cartridge from the body using a key Nr. 24, then you have to turn cup (F) on the crown ring (E), choosing flow requested from position 1 (Full Open) to position 4 (Full Closed). Tightening torque of cartridge must be 12 Nm.

INSTALLATION:

It is important to install a filter before the valve and to first clean the pipes from impurities before installation.

REPAIRING:

- **Flush valve does not close properly:** check whether the rubbers should be replaced and clean the inside head of the flow meter.
- **Flow meter closes too Quickly:** check the rubbers.
- **Flow meter has an inadequate flow rate:** check the size of the pipes before the flow meter, clean the filter and check the precision of the system.